

# ALCOVA

A heated towel rail made from round curved tubes and handtowel shelves.

Its original shape encourages you to enter: in fact, the largest model even has a metal seat.

Once inside, the warmth gently caresses you: an important accessory for the bathroom.


## DIMENSIONS

Width 50 / 60 / 75 cm  
 Height 110 / 145 / 185 cm  
 Depth 20 / 26 / 40 cm  
 Depth from wall 24 / 30 / 40 cm



| MODEL  | HP<br>cm | EN 442          |                 | ▲ ▽<br>t.c.<br>cm | Height<br>H<br>cm | Width<br>L<br>cm | Weight  |      | Volume<br>V<br>dm <sup>3</sup> | Towel bar<br>on request<br>cm |
|--------|----------|-----------------|-----------------|-------------------|-------------------|------------------|---------|------|--------------------------------|-------------------------------|
|        |          | Δt 50 K<br>watt | Δt 30 K<br>watt |                   |                   |                  | M<br>Kg | V    |                                |                               |
| ALCOVA | 100-20   | 591             | 311             | 9,3               | 110               | 50               | 8,7     | 2,12 | 30                             |                               |
| ALCOVA | 100-26   | 768             | 404             | 9,3               | 110               | 50               | 11,3    | 2,76 | 30                             |                               |
| ALCOVA | 145-20   | 737             | 388             | 9,3               | 145               | 60               | 12,1    | 2,73 | 30 and/or 50                   |                               |
| ALCOVA | 145-26   | 951             | 500             | 9,3               | 145               | 60               | 15,8    | 3,55 | 30 and/or 50                   |                               |
| ALCOVA | 185-20   | 948             | 499             | 9,3               | 185               | 75               | 13,3    | 3,50 | 30 and/or 50                   |                               |
| ALCOVA | 185-26   | 1232            | 648             | 9,3               | 185               | 75               | 17,1    | 4,56 | 30 and/or 50                   |                               |
| ALCOVA | *185-40  | 1232            | 648             | 9,3               | 185               | 75               | 19,2    | 4,56 | 30                             |                               |

\*model with seat: maximum load 95 kg      Δt 40K = Watt Δt 50Kx0,755      Electric and mixed versions not available

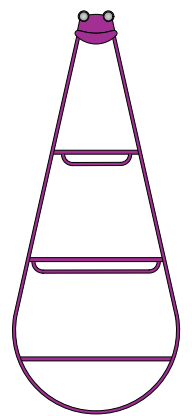

BEFORE ORDERING, PLEASE CHECK THE REQUIRED PRESSURE AND THE WORKMANSHIP OF THE CIRCUIT. (WATCH OUT FOR THE "SIPHON" EFFECT, PAGE 3)

HANDLE for towel welded under the shelf at the front  
 L 30 cm Art. MA3  
 L 50 cm Art. MA5

MINIMUM OPERATING PRESSURE 1,5 BAR  
 MAXIMUM OPERATING PRESSURE 8 BAR


STANDARD PRODUCTION  
 White sablé paintwork - M4B brackets  
 Tolerance ±3 mm - Air valve ø 1/8"

PRODUCTION ON REQUEST  
 Paintwork to Brem color list with colored B35 brackets +15/25%


STANDARD FITTING  
 HK ø 1/2"  
 Check circuit flow rate and pressure



## TAPPING CENTRES

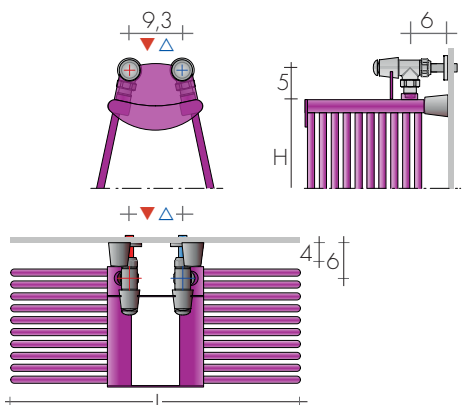

FIXINGS  
M4 brackets  
included

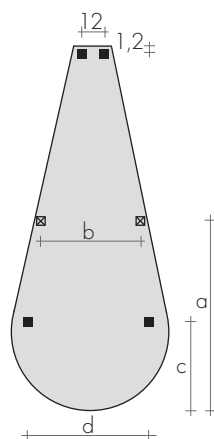

ALCOVA h 185 cm

| Mod. H    | a<br>cm | b<br>cm | c<br>cm | d<br>cm |
|-----------|---------|---------|---------|---------|
| 100 - ..  | -       | -       | 14      | 38      |
| 145 - ..  | -       | -       | 14,8    | 45,2    |
| 185 - ..  | 93,1    | 47      | 20,4    | 59,9    |
| *185 - .. | 78,6    | 54      | 19,1    | 27,5    |




ALCOVA 185-40

## RECOMMENDED VALVES

### CHROME PLATED VALVES KIT WITH:

- n°2 Valves with O-ring Tangs
- n°2 Fittings (multilayer ø16, copper ø12,14)
- n°2 Round washers

On request: Polished stainless tube cover  
(to be cut to right size) Art. CA18




ANGLED TON VALVES KIT  
page 277

Art. KVS

ANGLED MINI VALVES KIT  
chrome-plated or white color Art. KMS

page 278

REMOTE FITTINGS, NOT AVAILABLE

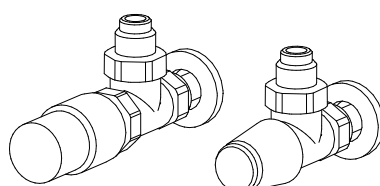

ANGLED TON VALVES KIT with  
THERMOSTATIC head Art. KTS

M4 brackets

