

# CROSS GILDED/SILVER LEAF WITH OVERLAPPING SQUARES

CROSS also comes in a prestigious version with a gilded-leaf or silver-leaf finish for

special effects. No more than three overlapping elements.

Can be used as a towel-heater, or simply a decorative feature in any room.


## DIMENSIONS

Width: 48/56/64/88/96/120/128/152/168 cm

Height: 48/56/64/88/128/152/168/184 cm

Depth: 6 cm

Depth from wall: 9,5 cm

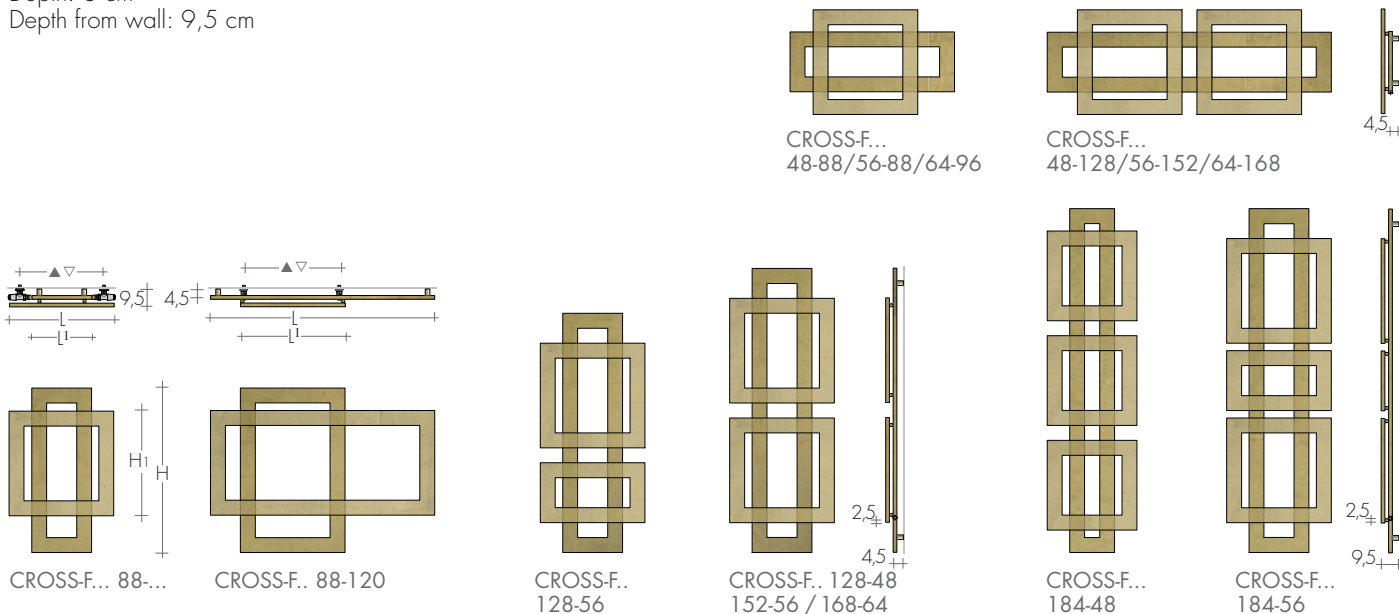

## MODEL

MODEL	HL cm	EN 442		▲▽ i.c. cm	Height H (Hi) cm	Width L (Li) cm	Weight M Kg	Volume V dm <sup>3</sup>
		Δt 50 K watt	Δt 30 K watt					
CROSS-F... 48-88	48-88	394	208	43	48 (24)	88 (48)	7,9	4,8
CROSS-F... 48-128	48-128	635	335	99	48 (24)	128 (104)	12,8	7,7
CROSS-F... 56-88	56-88	429	227	51	56 (32)	88 (56)	8,6	5,2
CROSS-F... 56-152	56-152	772	408	115	56 (32)	152 (120)	15,6	9,4
CROSS-F... 64-96	64-96	480	253	59	64 (32)	96 (64)	9,7	5,9
CROSS-F... 64-168	64-168	892	471	131	64 (32)	168 (136)	17,6	10,7
CROSS-F... 88-48	88-48	394	208	37	88	48 (24)	7,9	4,8
CROSS-F... 88-56	88-56	429	227	45	88	56 (32)	8,6	5,2
CROSS-F... 88-120	88-120	617	327	69	88	120 (56)	12,4	7,5
CROSS-F... 128-48	128-48	623	329	37	128	48 (24)	12,8	7,7
CROSS-F... 128-56	128-56	656	346	45	128	56 (32)	13,5	8,2
CROSS-F... 152-56	152-56	757	400	45	152	56 (32)	15,6	9,4
CROSS-F... 168-64	168-64	875	462	45	168	64 (32)	18,7	11,3
CROSS-F... 184-48	184-48	890	470	37	184	48 (24)	18,7	11,3
CROSS-F... 184-56	184-56	956	505	45	184	56 (32)	20,0	12,1

(Δt 40K = W Δt 50Kx0,755)

CROSS-FO Gilded leaf  
CROSS-FA Silver leaf

## STANDARD PRODUCTION

Brackets in golden BR0019/silver 0002MS

Tolerance ± 3mm - Air vent ø 1/8"

MAXIMUM OPERATING PRESSURE 4 BAR

## PRODUCTION ON REQUEST

Valves/brackets in gilded/silver finish p.275

B70 brackets for 13 cm depth from wall


Electric version, on request

## STANDARD FITTING

REG ø 1/2"


On request fitting ø 3/8"

Special fittings page 287




## TAPPING CENTRES


Horizontal Models

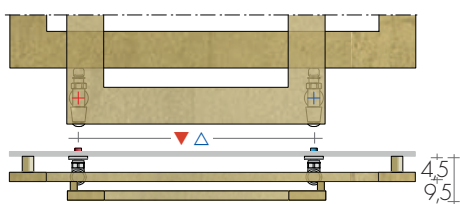

Vertical Models



TECHNICAL DATA page 66

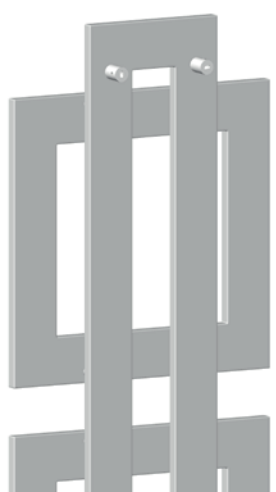

**FIXINGS**  
Brackets included  
position page 66


## RECOMMENDED VALVES

as standard at the rear of the radiator

**CHROME PLATED VALVES KIT WITH:**

- n°2 Valves with O-ring Tangs
- n°2 Fittings (multilayer ø16, copper ø12,14)
- n°2 Round washers

On request: Polished stainless tube cover  
(to be cut to right size) Art. CA18

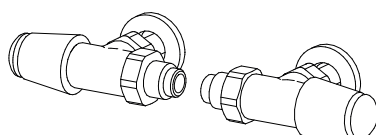


REVERSE TON VALVES KIT  
page 277

Art. KVR

VALVES IN GILDED/SILVER LEAF FINISH  
page 275

extra

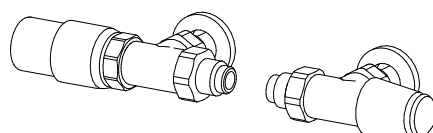

REVERSE TON VALVES KIT with  
THERMOSTATIC head

Art. KTR

REMOTE FITTINGS Art. REM  
tapping centres ▲▼ L<sup>1</sup> - 6cm



2,5 ±



REMOTE VALVES ASSEMBLY KIT p. 281 with:  
- n°2 Fittings (multilayer ø16, copper ø12,14)

REMOTE TON VALVES ASSEMBLY KIT  
Art. KVG

REMOTE TON VALVES ASSEMBLY KIT with  
THERMOSTATIC head Art. KVGT




CROSS FO 128-48










# CROSS-Q TECHNICAL DATA (for overlapping squares)

## TAPPING CENTRES AND FIXINGS



CrossFRAME  
towel heaters

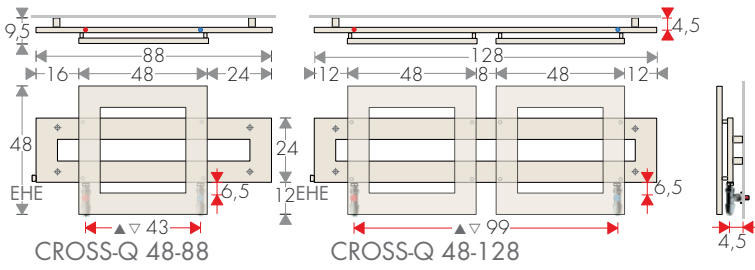

EHE: sleeve for Electric Heating Element (on request)

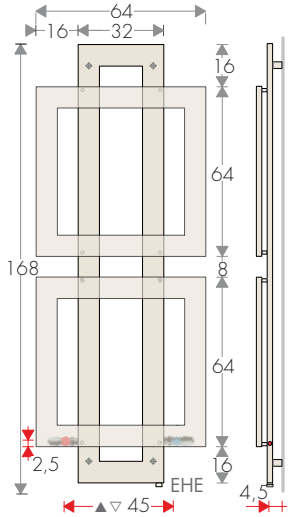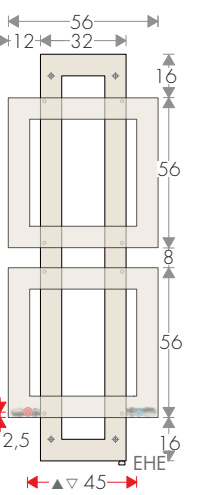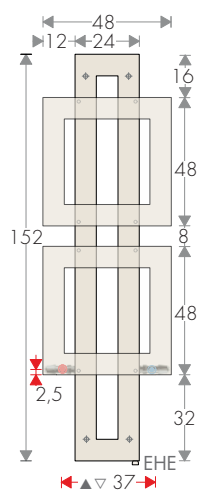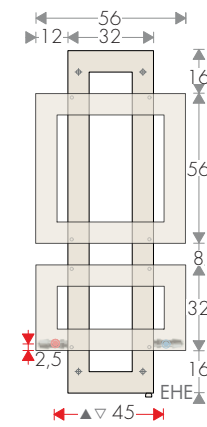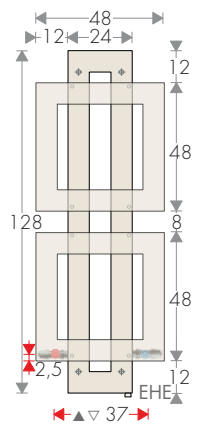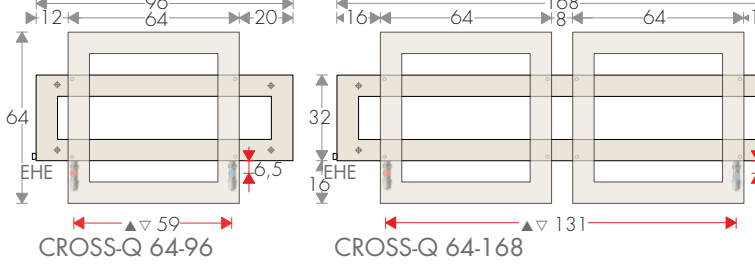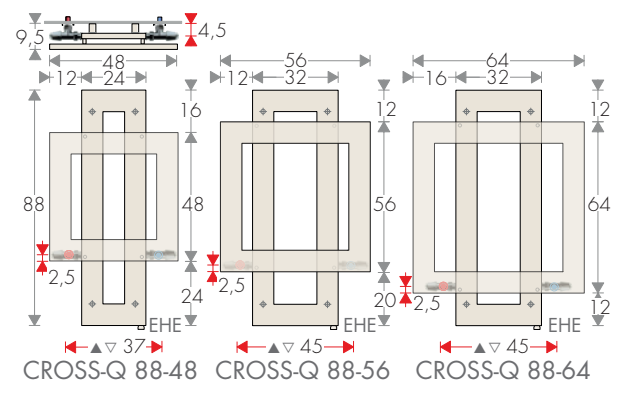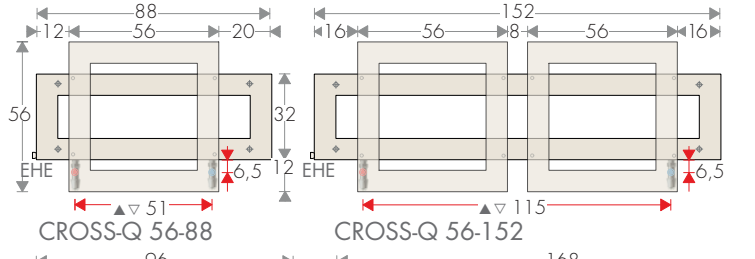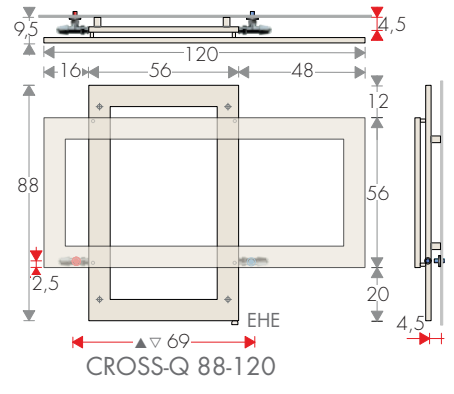

### BRACKETS POSITION



### TAPPING CENTRES with REVERSE VALVES

