

CROSS-Q

Large, variously assembled, rectangular tubes are used to produce CROSS-Q.

Innovative radiators thanks to 90° corners and strong geometric shapes (squares and

rectangles) sitting on top of each other or interwoven.







DIMENSIONS

Width: 48/56/64/100/116 cm




Height: 48/56/64/184/208/224/228 cm

Depth: 6 cm

Depth from wall: 10 cm

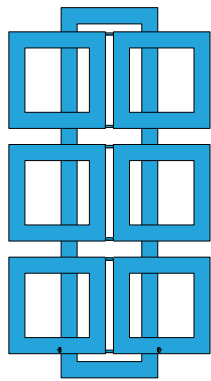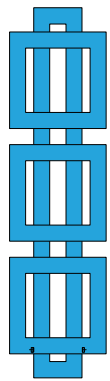

REG Fittings

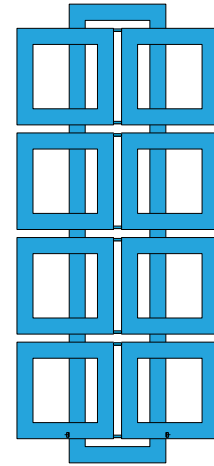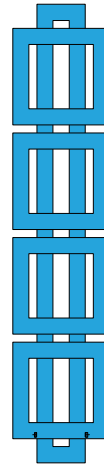

CROSS-Q 184-48
CROSS-Q 208-56
CROSS-Q 224-64

CROSS-Q 184-100
CROSS-Q 208-116

CROSS-Q 48-48
CROSS-Q 56-56
CROSS-Q 64-64

CROSS-Q 228-48

CROSS-Q 228-100

MODEL	H-L	Watt Δt 50 K	$\blacktriangle \nabla$ t.c. •cm	Height H (Hi) cm	Width L (Li) cm	Weight M Kg	Volume V dm ³	EN 442 Watt Δt 50 K
								Electrical immersion heater class II W
CROSS-Q	48-48	180	19	48	48	3,5	2,1	-
CROSS-Q	56-56	216	19	56	56	4,1	2,5	-
CROSS-Q	64-64	252	19	64	64	4,8	2,9	250
CROSS-Q	184-48	890	37	184 (160)	48 (24)	18,7	11,3	900
CROSS-Q	184-100	1442	61	184 (160)	100 (48)	30,2	18,3	1500
CROSS-Q	208-56	1055	37	208 (184)	56 (24)	22,1	13,4	-
CROSS-Q	208-116	1689	61	208 (184)	116 (48)	35,4	21,5	-
CROSS-Q	224-64	1203	37	224 (200)	64 (24)	25,2	15,3	1200
CROSS-Q	228-48	1123	37	228 (204)	48 (24)	24,0	14,6	1200
CROSS-Q	228-100	1826	61	228 (204)	100 (48)	39,1	23,7	-

• Reverse Brem valves: Quadra model recommended

STANDARD PRODUCTIONS

White "sablé" SB9010 paintwork-white brackets
Tolerance ± 3 mm - Air vent $\varnothing 1/8"$

PRODUCTION ON REQUEST

Paintwork to Brem color list with chrome-plated
brackets +15/35%

STANDARD FITTING

CD $\varnothing 1/2"$ on the back rectangle
eg. CROSS-Q 184-48, CD, SB9010

